



ADVANTAGE

INTERIOR

BUILDER'S LEGACY

PREMIUM WALL PRIMER/SEALER



GREAT PAINT GREAT PEOPLE



hallmanlindsay.com

PREMIUM WALL PRIMER/SEALER

DRYWALL PRIMER/SEALERS are designed for preparing walls and ceilings for painting. Formulated with a higher resin-to-solids ratio allows for improved enamel holdout allowing paints to reach their full sheen in fewer coats. These thin film products require less material to prime and seal surfaces for faster spray application on residential, commercial, and institutional projects.

PREMIUM WALL PRIMER/SEALER is our finest drywall primer/sealer designed to create a strong seal on new drywall. This premium sealer creates a strong foundation for flat, enamel, and most waterborne epoxy topcoats. It is designed for use with our premium wall paints including WONDERKOTE EARTHSCAPES, LUSTRE, and PURE.

FEATURES

- Great Enamel Hold-Out
- Exceptional Walk-Away Appearance
- Faster Spray Application
- LEED v4 Credit Eligible

BENEFITS

Premium Enamel Hold-Out

Fortified enamel holdout allows topcoats to build to their true sheen faster for improved coverage and touch-up qualities.

Versatile Application


Fast spray and easy rolling formulation allows for a versatile application. Excellent for use on drywall repair, remodel, and new construction projects.

Environmentally Responsible Product

This zero-VOC, LEED v4 credit eligible finish meets the performance needs of contractors, specifiers, property managers, and general contractors looking to meet the strictest air quality standards.



EXCEPTIONAL WALK-AWAY APPEARANCE

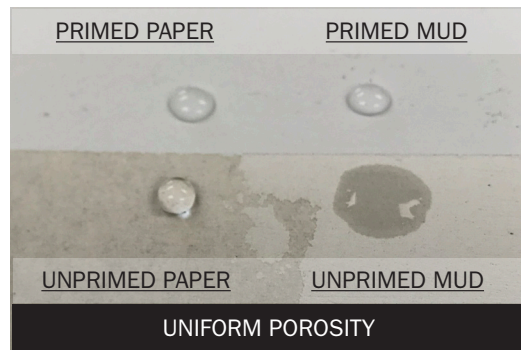

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 1 Hour*

Recoat: 4 Hours*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

400 sq. ft./Gal to achieve 4.0 mils WFT; 1.1 mils DFT

Solids Content:

Volume: 28% ± 2 Weight: 43% ± 2

BASES: PRIMER/SEALER - 220 SERIES

EQUIPMENT RECOMMENDATIONS

Roller: 1/2"-1" nap synthetic cover

Brush: 100% nylon or synthetic blend

Airless: Minimum 1 GPM with .021" tip @ 2700 - 3100 PSI

HVLP: 3-4 stage turbine, 6-8 PSI, .051-.070 projector set

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

<5 g/L 0.04 lbs./Gal

FINISHING RECOMMENDATIONS

High-Performance Acrylic: DURATECH Series

Designer Finish: PURE and LUSTRE Series

Premium Finish: WONDERKOTE and EARTHSCAPES Series

Professional Finish: PRO KOTE Series

Builder's Legacy Finishes: MASTER KOTE, VELVET ARMOR, and PREMIUM HI-BUILD Series

