



PREMIUM
INTERIOR

AQUA KOTE

Hallman Lindsay serves the communities where we live and work. We provide expertise and quality products made and mixed in Wisconsin for over 60 years.



GREAT PAINT. GREAT PEOPLE.

AQUA KOTE ENAMEL UNDERCOAT

AQUA KOTE ENAMEL UNDERCOAT is a premium waterborne primer designed for interior wall and wood surfaces. Fast-drying formulation provides exceptional adhesion and hold-out that dries in one hour and sands to a powder for faster production. Versatile application allows smooth spraying for production needs or easily brushed and rolled for smaller projects. Strong acrylic adhesion forms tough bonds to factory primed and galvanized surfaces including conduit, ductwork, and hollow metal doors and frames.

AQUA KOTE ENAMEL UNDERCOAT is a premium primer/sealer that can be used on a variety of new construction and remodel projects. It can be used on masonry, concrete, plaster, galvanized, drywall, and many wood surfaces. Exceptional enamel holdout with an easy-sand finish make it ideal for use on trim, cabinets, and doors.



FEATURES

- Excellent Enamel Hold-Out
- Easy-Sand Finish
- Fast-Drying Formula
- Excellent Adhesion

BENEFITS

Enamel Hold-Out


The hard, durable film provides an excellent sealed surface for any enamel topcoat. Improved hold-out helps all products build sheen faster.

Excellent Adhesion

Forming a strong bond on most surfaces, it is a great primer for repainting trim and galvanized surfaces.

Fast-Drying Formula

Dries in under an hour. Allowing for priming, sanding, and finishing in the same day for faster production and tighter timelines

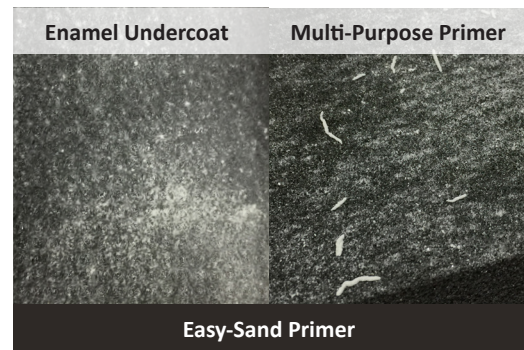

TECHNICAL INFORMATION

BASES: WHITE - 231 SERIES

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 30 minutes*

Recoat: 2 hours*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

450 sq. ft./Gal to achieve
3.5 mils Wet Film Thickness
1.4 mils Dry Film Thickness

Solids Content:

Volume: 42% ± 2 Weight: 59% ± 2

EQUIPMENT RECOMMENDATIONS

Roller: 3/8" - 1/2" nap shed-resistant or lambswool cover

Brush: 100% Nylon or synthetic blend

Airless: Minimum 1/2 GPM, .017" tip @ 2500 - 2900 PSI

HVLP: Twin-stage turbine, 5-8 PSI, .051-.070 projector set

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

26 g/L 0.22 lbs./Gal

MPI Category:

#50

FINISHING RECOMMENDATIONS

INTERIOR

Latex Finishes: Compatible with all Hallman Lindsay waterborne interior finishes.

Alkyd Finishes: Duraguard Series.

EXTERIOR

Latex Finishes: Compatible with all Hallman Lindsay waterborne interior finishes.

Alkyd Finishes: Duraguard Series.