



ADVANCED
INTERIOR

BUILDER'S LEGACY
HERCOFLAT ROLLER TEXTURE



GREAT PAINT GREAT PEOPLE

hallmanlindsay.com

HERCOFLAT ROLLER TEXTURE

HERCOFLAT ROLLER TEXTURE is a premium quality sand texture primer formulated specifically for easy brush and roll application. Formulated with a proprietary HERCOFLAT aggregate, this non-abrasive sand-like texture provides a more uniform finish than traditional pumice additives. This heavy-bodied texture paint provides a washable surface that helps to minimize drywall dents, taped seams, and other minor surface imperfections.

HERCOFLAT ROLLER TEXTURE is designed to easily provide a uniform sand-like finish on interior surfaces. It can be applied to a variety of surfaces including drywall, plaster, and properly prepared painted surfaces. Easy brush and roll application makes it ideal for remodel and renovation work where spray application can be prohibitive.

FEATURES

- Easy, Uniform Application
- Non-Abrasive Sand Texture
- Easily Blend Drywall Repair
- Low-Odor, Low-VOC

BENEFITS

Low-Odor, Low-VOC

Low-odor application allows for painting in occupied spaces without major disruption.

Easy Application

HERCOFLAT texture provides easy brush and roll application for a uniform appearance without the use of spray equipment.

Washable Sand Texture Surfaces


Proprietary HERCOFLAT texture does not have the sharp edges found with other textures providing a washable finish.



GREAT FOR DRYWALL REPAIR AND TOUCH-UP



ROLLER FRIENDLY APPLICATION

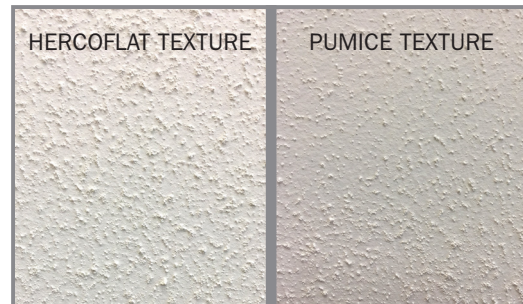

UNIFORM TEXTURE APPLICATION

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 1 hour*

Recoat: Overnight*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

200 sq. ft. / Gal to achieve
8 mils WFT; 3 mils DFT

Solids Content:

Volume: 38% ± 2 Weight: 55% ± 2

BASES: SAND TEXTURE - 358R SERIES

EQUIPMENT RECOMMENDATIONS

Roller : ½" - 1" synthetic roller cover

Brush: Synthetic blend 5" or 6" block brush

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

40.368 g/L 0.34 lbs./Gal

FINISHING RECOMMENDATIONS

High-Performance Acrylic: DURATECH Series

Designer Finish: PURE and LUSTRE Series

Premium Finish: WONDERKOTE and EARTHSCAPES Series

Professional Finish: PRO KOTE Series

Builder's Legacy Finishes: MASTER KOTE, VELVET ARMOR, and PREMIUM HI-BUILD Series