




DESIGNER

INTERIOR

CLEARGUARD

WATERBORNE URETHANE

GREAT PAINT GREAT PEOPLE

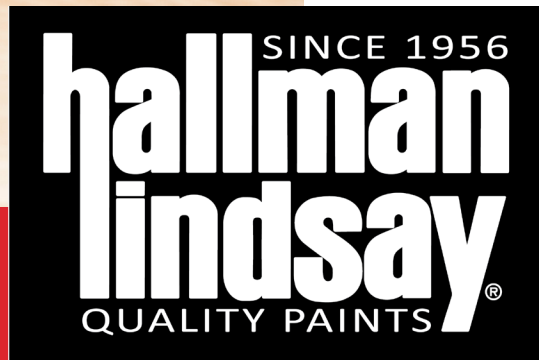

hallmanlindsay.com

WATERBORNE URETHANE

CLEARGUARD WATERBORNE URETHANE is a premium oil-modified urethane clear wood finish. This floor-rated finish has exceptional flow and leveling helping to provide a smooth, blemish-free coating on wood floors, trim, doors and all other interior wood surfaces. The oil-modified resin provides a durable finish with a slight amber cast for a warm, natural wood appearance. Strong resistance to water, oil, household chemicals, and abrasion provides long-lasting protection and beauty.

CLEARGUARD WATERBORNE URETHANE is designed to provide a durable, clear wood finish to a variety of wood surfaces in an easy-application formula. Use it on any surface where durability is required, such as sports floors, multi-purpose gyms, studios, and heavy traffic residential and commercial areas. Can be applied using a variety of applications including brush, roller, pad, squeegee, and weighted T-bar.

FEATURES

- Fast Recoat Times
- Clear, Natural Amber Finish
- Floor-Rated Urethane
- Excellent Flow & Leveling

BENEFITS

Waterborne Urethane Technology


Improve air quality and performance by providing the classic amber toning of alkyd products with the clean-up, VOC's, and low odor of a waterborne finish.

Smooth, Uniform Finish

Self-leveling technology helps reduce lap lines, roller stipple, and brush strokes to provide a smooth, seamless finish.

Fast Return to Service

Quick dry times allow for multiple coats to be applied in the same day minimizing down time for a faster return to service.

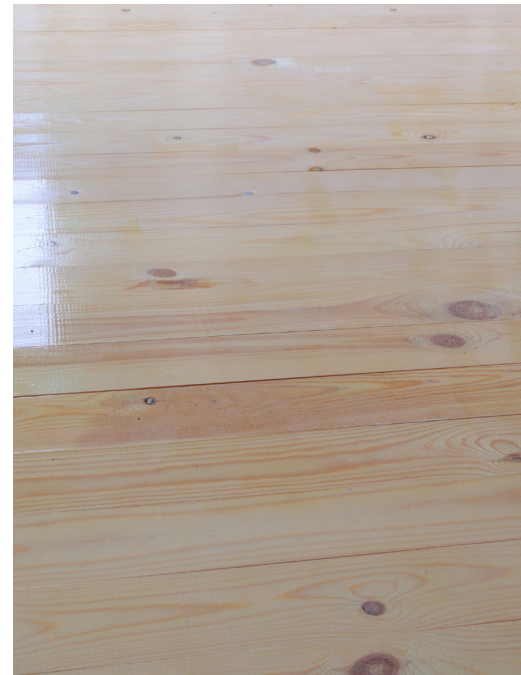

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H.:

To Touch: 1 Hour*

Recoat: 3 Hours*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

400-535 sq. ft./ Gal to achieve 3.0-4.0 mils WFT; 1.0-1.2 mils DFT

Solids Content:

Volume: 29% ± 3 Weight: 33% ± 3

BASES: SATIN - V365 SERIES

EQUIPMENT RECOMMENDATIONS

Airless: Minimum 1/2 GPM with .013" tip @ 2300-2700 PSI

Conventional: Binks #7 gun, 36 needle, 36SD air nozzle, 36 fluid nozzle, 7.8 CFM @ 30 PSI

HVLP: Twin-stage turbine, 5-8 PSI, .051 to .070 projector set

Roller: 1/4" nap shed-resistant or lambswool cover

Brush: 100% Nylon or synthetic blend

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

178 g/L 1.49 lbs./Gal

FINISHING RECOMMENDATIONS

New Work

Stain: Woodshades Interior Stain Series.

Sealer (optional): Spray Kote Sanding Sealer, V372. (Vertical Surfaces Only)

Recoat Surfaces: May be applied over existing coatings only after sample applications have been made to check the sensitivity of the existing coating. Surfaces must be properly prepared if sensitivity or lifting occurs.