



PREMIUM

INTERIOR

WONDERKOTE
LATEX WALL FINISH



GREAT PAINT GREAT PEOPLE



hallmanlindsay.com

WONDERKOTE

WONDERKOTE interior latex delivers the perfect balance between long-lasting beauty and fast, easy application that professionals have trusted for decades. High-hiding formula provides exceptional coverage and seamless touch-up for fast, easy color changes and job completion. The durable and washable finish repels stains, scuffs, and other signs of everyday living for lasting beauty and protection.

WONDERKOTE is our premium line of interior low-VOC finishes designed for consistent results with custom painting projects and can be applied to a variety of surfaces including drywall, plaster, and previously painted surfaces. WONDERKOTE can be applied as a premium upgrade in new construction projects or as a workhorse line for residential and commercial repainting projects.

FEATURES

- Easy Custom Color Changes
- Livable & Lasting Finish
- Great Durability
- Reliable Performance

BENEFITS

Maintenance Friendly Finish


Premium formula allows most stains to easily wipe off and release with soap and water. Seamlessly touch-up stubborn stains, dings, and scuffs.

Reliable Coverage

Improved hide reduces the number of coats and time spent cutting compared to typical professional finishes.

Easy Application

Enjoy consistent, user-friendly application where paint glides off the brush and roller providing a nice, uniform sheen with good touch-up qualities.

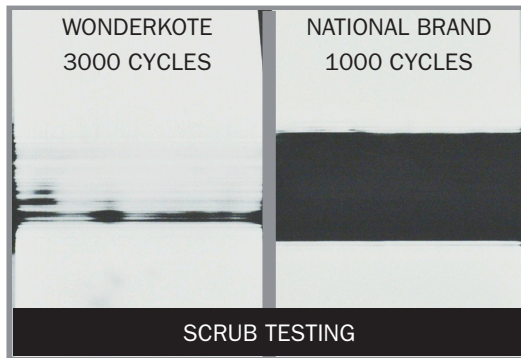

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:
 To Touch: 1 Hour* Recoat: 4 Hours*
 *Cooler temperatures and higher relative humidity will extend dry times
Recommended Spreading Rate:
 400 sq. ft./gal to achieve
 4.0 mils WFT 1.6 mils DFT
Solids Content:
 Volume: 40% ± 2 Weight: 53% ± 2

BASES: FLAT - 260 SERIES · EGGSHELL - 270 SERIES · SEMI-GLOSS - 295 SERIES

EQUIPMENT RECOMMENDATIONS

Airless: Minimum .70 GPM, 2500 PSI, .017-.019" Tip
HVLP: Twin-stage turbine, 5-8 PSI, .051 to .070 projector set
Roller: ½" - ¾" nap synthetic cover
Brush: 100% Nylon or Synthetic Blend

SAFETY AND COMPLIANCE

VOC (EPA Method 24):
 30 g/L 0.25 lbs./Gal

PRIMER RECOMMENDATIONS

New Work
Drywall: Appropriate BUILDER'S LEGACY Primer/Sealer or Surfer.
Plaster/Masonry: GRIPCRETE Masonry/Plaster Primer, 166.
Wood: AQUA KOTE Enamel Undercoat, 231.
Galvanized Surfaces: AQUA KOTE Enamel Undercoat, 231, ACRYLIC DTM Primer/Finish, 338.
Steel Surfaces: METALGUARD QD Rust-Inhibitive Primer, 330
Block: Appropriate GRIPCRETE Block Filler or Surfer.
Repaint: Self-Priming (requires two coats).